DATE	SYM	REVISION RECORD	BY:	DCN
MAY 10 11	A	RELEASE TO PRODUCTION	SCS	C612
AUG 21 14	B	ADD -100 DRAWING	SCS	D443
MAY 7 15	C	MOVED GRAPHICS TO A LABEL	SCS	D588

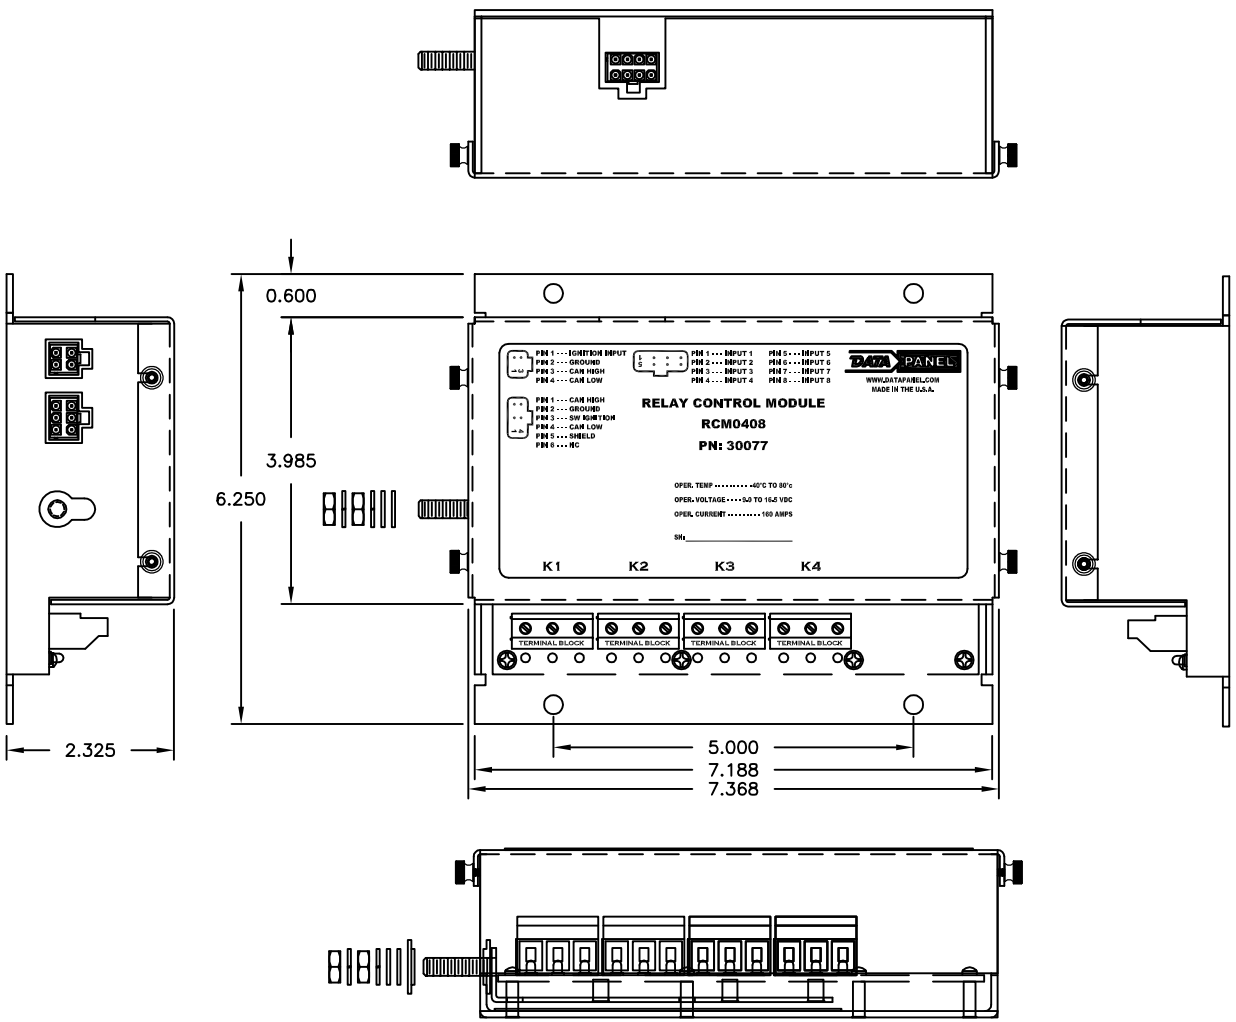

NOTE:

1. EACH TERMINAL SCREW HAS A MAX CAPACITY OF 2 – 16 AWG WIRES.
2. TERMINAL BLOCKS AND N.O./N.C. RELAY OUTPUTS PROTECTED BY A 10–30 AMP CIRCUIT BREAKER.
3. +12 VOLTS MAY BE PROVIDED BY A COMMON BUSS BAR OR EACH CIRCUIT BREAKER AND RELAY OUPUT INDIVIDUALLY.
4. ALL RELAY CIRCUITS INCLUDE DIAGNOSTIC LEDS.
   RED LED ON: +12 VOLTS TO RELAY COMMON.
   GREEN LED ON: +12 VOLTS TO RELAY N.O. OR N.C.
5. COILS ARE DIODE SUPRESSED.
6. RELAYS AND CIRCUIT BREAKERS POPULATED BY USER.

DATA PANEL CORPORATION CLAIMS ALL PROPRIETARY RIGHTS TO THIS DRAWING AND THE INFORMATION IT CONTAINS. THIS MATERIAL IS CONFIDENTIAL. DISCLOSURE, REPRODUCTION, AND MANUFACTURING IS STRICTLY PROHIBITED WITHOUT THE EXPRESS WRITTEN PERMISSION OF DATA PANEL CORPORATION. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.

TOLERANCES EXCEPT WHERE NOTED

DECIMAL ± .010

± .03

FRACTIONAL ± 1/32

ANGULAR ± 1°

DATA PANEL CORP.

CUSTOMER: XXX

MATL: SEE NOTE

FINISH: SEE NOTE

SIZE: A

SCALE: NTS

DRAWN BY: SCS

APP. BY:

TITLE: PCB ASSEMBLY, 4 POS RELAY

DATE: MAY 10 11

DRAWING NUMBER: 30077

REV.: C